



Canton Lake, Oklahoma

U.S. ARMY CORPS OF ENGINEERS

BUILDING STRONG®

FACT SHEET as of February 6, 2012

AUTHORIZATION: This project was authorized Under the Flood Control Act of 1938; Flood Control Act of 1946 (irrigation storage); Flood Control Act of 1948; and the Water Resources Development Act of 1990 (water supply storage).

TYPE OF PROJECT: Flood damage reduction, water supply, recreation, environmental stewardship.

PROJECT PHASE: O&M



CONGRESSIONAL INTEREST: Senators Coburn and Inhofe, OK; Representative Lucas, OK-3

NON-FEDERAL SPONSOR: N/A

BACKGROUND: Canton Dam is located on the North Canadian River about 2 miles north of Canton in Blaine County, Oklahoma, and about 75 miles northwest of Oklahoma City in Oklahoma County, Oklahoma. Authorized in 1938, Canton Lake is the largest of the three flood control lakes on the North Canadian River upstream of Oklahoma City. All of the available water supply storage in Canton is under contract to Oklahoma City. The dam is a 15,140 foot long rolled, earth-filled structure with a 640 foot gated, concrete spillway. Spillway discharges are controlled by three 7x12 foot sluices that pass through the spillway. In FY 2010 the project hosted over 760,000 visitors. At conservation pool the lake covers 7910 acres.

STATUS: FY 2011 activities included routine scheduled operations and maintenance activities at the project. One major maintenance contract was awarded in FY 2011 for the removal of debris from the Canadian Park area after it was damaged by a tornado.

ISSUES: None.

FINANCIAL SUMMARY (\$):

	<u>O&M</u>
Federal Cost Estimate	N/A
Non-Federal Cost Estimate	N/A
Total Project Cost	N/A
Allocation thru FY 2010	N/A
ARRA Funding	\$ 873,000
Allocation for FY 2011	\$1,949,000
Allocation for FY 2012	\$3,825,000
President Budget FY 2013	\$2,242,000
Amount That Could Be Used for FY 2013	\$2,242,000
Balance to Complete	N/A

SCHEDULE:


FY 2012 Scheduled Work: The current FY2012 budget is being used for routine operations and maintenance activities at this project. Planned contract major maintenance at the project in FY 2012 is focused on the repair of the sluice gates and tie-back beams and the installation of a ground source heat pump system at the project office. Funding has been identified as part of the emergency supplemental appropriation to undertake repairs to the tornado damaged Canadian Park campground at the project.

FY 2013 Budget: The FY 2013 President's budget will be used for routine operations and maintenance activities at the project. Planned contract major maintenance at the project in FY 2013 will consist of replacing the trunion seals.

COMPLETION: N/A. Operating project.

For more information regarding the Canton Lake project, contact Kathryn Carlson, Lake Manager, at (580) 886-2989, or Kathryn.Carlson@usace.army.mil.

PROJECT MAP CANTON LAKE, OKLAHOMA

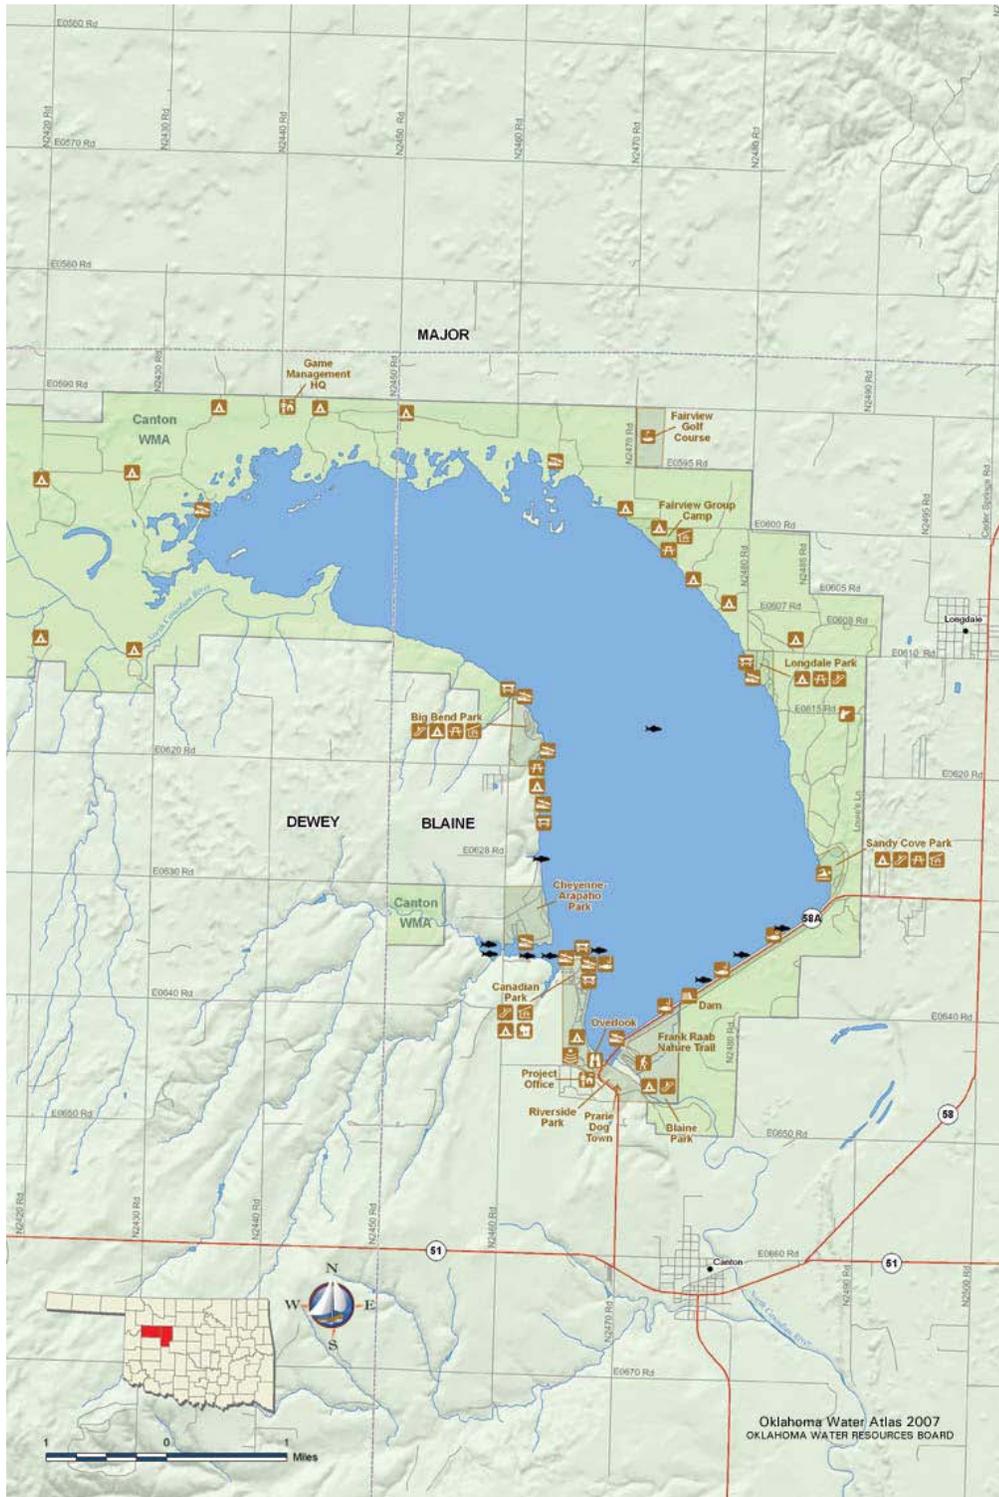

U.S. ARMY CORPS OF ENGINEERS – TULSA DISTRICT
www.swt.usace.army.mil