



Oologah Lake, Oklahoma

U.S. ARMY CORPS OF ENGINEERS
FACT SHEET as of February 6, 2012

BUILDING STRONG®

AUTHORIZATION: This project was authorized under the Flood Control Act of 1938.

TYPE OF PROJECT: Flood damage reduction, recreation, water supply, environmental stewardship.

PROJECT PHASE: O&M



CONGRESSIONAL INTEREST: Senators Coburn and Inhofe, OK; Representative **Boren**, OK-2.

NON-FEDERAL SPONSOR: N/A

BACKGROUND: Oologah Lake is situated on the Verdigris River at river mile 90.2, about 2 miles southeast of Oologah and about 27 miles northeast of Tulsa, in Rogers County, Oklahoma. The dam is a rolled earth-filled embankment about 4000 feet long. The controlled spillway is located in a saddle about 2 miles east of the left abutment. It consists of seven 40x21 foot high radial gates mounted upon a modified concrete ogee weir. The outlet works consist of two 19 foot diameter conduits, each served by two 9x19 foot gates. Oologah Lake receives over 900,000 public visits annually. At conservation pool the lake covers 31,043 acres.

STATUS: FY 2011 activities included routine scheduled operations and maintenance activities at the project. Major maintenance contracts awarded at the project in FY 2011 included replacing a service gate and replacing the service gate wire rope and hoists.

ISSUES: Oologah Lake requires additional funding to provide for critical maintenance that cannot be done through the regular appropriation. The project requires additional funds to continue repairs on the service gates and to solicit recreation proposals under the Oklahoma Lakes Demonstration Program (Sec. 3134 of WRDA 2007).

FINANCIAL SUMMARY (\$):

	<u>O&M</u>
Federal Cost Estimate	N/A
Non-Federal Cost Estimate	N/A
Total Project Cost	N/A
Allocation thru FY 2010	N/A
ARRA Funding	\$ 3,042,000
Allocation for FY 2011	\$ 2,089,000
Allocation for FY 2012	\$ 4,283,000
President Budget FY 2013	\$ 5,100,000
Amount That Could Be Used for FY 2013	\$ 7,350,000
Balance to Complete	N/A

SCHEDULE:


FY 2012 Scheduled Work: The current FY 2012 budget is being used for routine operations and maintenance activities at this project. Scheduled major maintenance at the project in FY 2012 includes replacing the service gates, cables, well liners, and 48 inch valve.

FY 2013 Budget: The FY 2013 President's budget will be used for routine operations and maintenance activities at the project. Planned major maintenance at the project in FY 2012 includes replacing an additional service gate.

COMPLETION: N/A. Operating project.

For more information regarding the Oologah Lake Project, contact Allen Ryan, Lake Manager, at (918) 443-2250 or Allen.G.Ryan@usace.army.mil.

PROJECT MAP OOLOGAH LAKE, OKLAHOMA

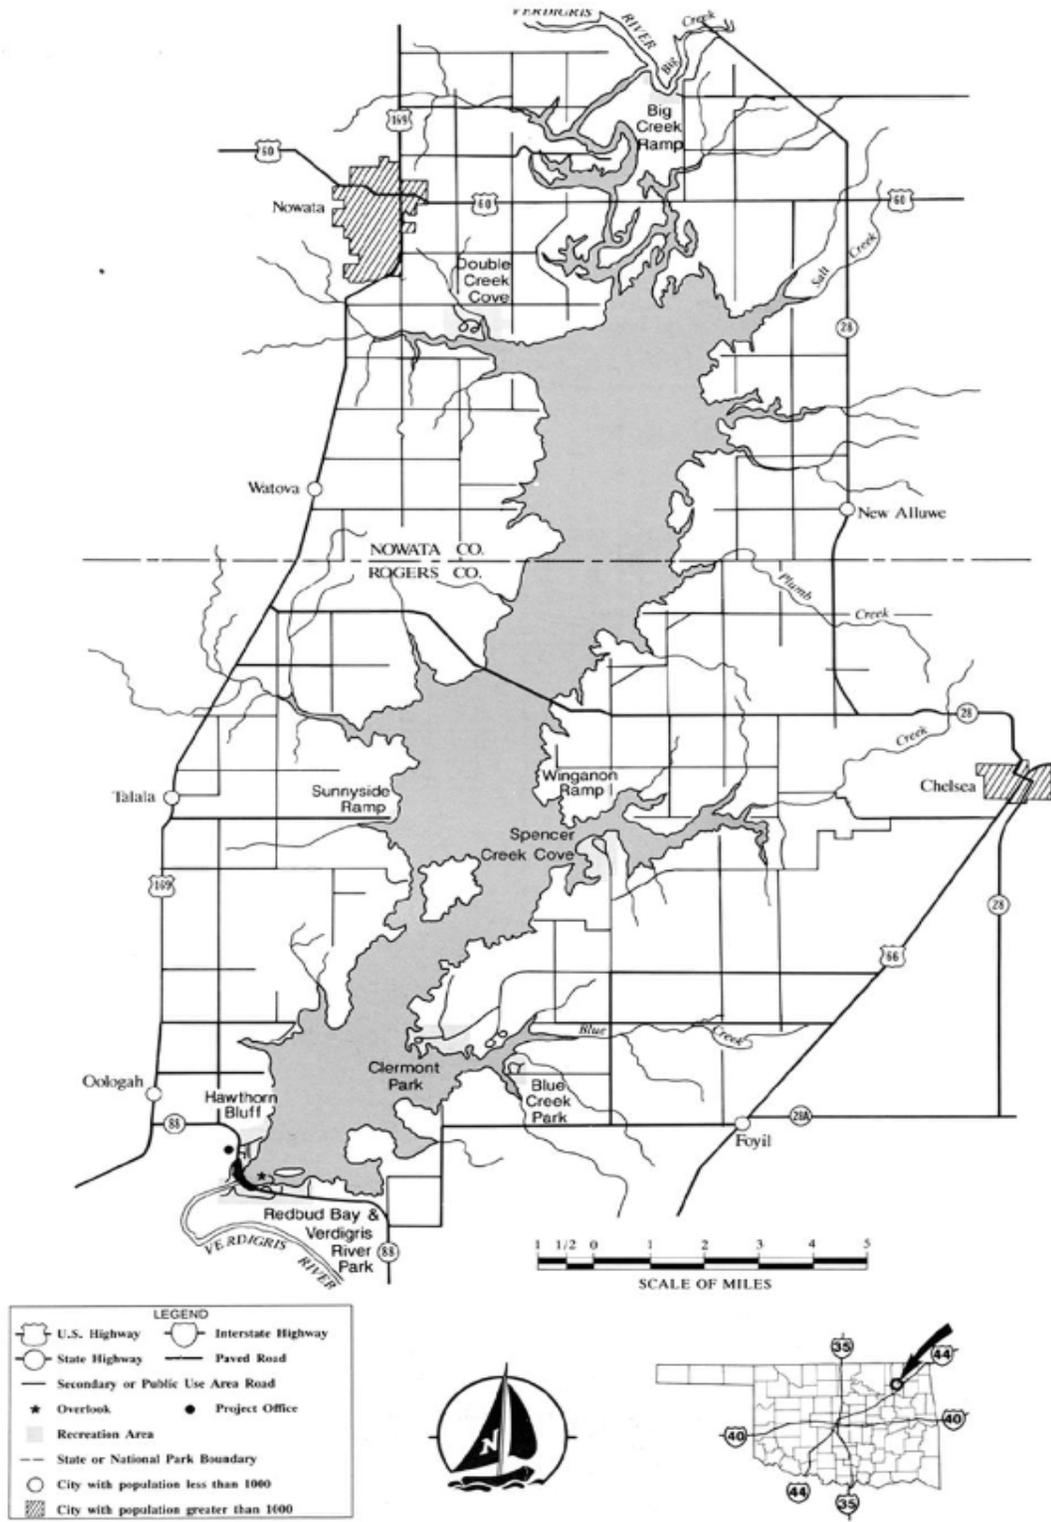

U.S. ARMY CORPS OF ENGINEERS – TULSA DISTRICT
www.swt.usace.army.mil