



U.S. ARMY CORPS OF ENGINEERS

BUILDING STRONG®

FACT SHEET as of February 6, 2012

**AUTHORIZATION:** Marion Lake was authorized under the Flood Control Act of 1950.

**TYPE OF PROJECT:** Flood risk management, recreation, water supply, and environmental stewardship.

**PROJECT PHASE:** O&M



**CONGRESSIONAL INTEREST:** Senators Moran and Roberts, KS; Representative **Huelskamp**, KS-1.

**NON-FEDERAL SPONSOR:** N/A

**BACKGROUND:** Marion Lake is situated on the Cottonwood River at river mile 126.7, about 3 miles northwest of Marion, Kansas. The dam is a rolled earth-filled embankment 8375 feet long, excluding the concrete spillway and non-overflow sections. The spillway is a gate-controlled, concrete, gravity ogee weir. Three 40x40 foot tainter gates control flows through the spillway. Approximately 400,000 public visits occur annually at the project. At conservation pool the lake covers 6210 acres.

**STATUS:** FY 2011 activities included routine scheduled operations and maintenance activities at the project. One major maintenance contract was awarded at Marion Lake in FY 2011 to install tainter gate wire ropes.

**ISSUES:** None.

<b><u>FINANCIAL SUMMARY (\$):</u></b>	<b><u>O&amp;M</u></b>
Federal Cost	N/A
Non-Federal Cost Estimate	N/A
Total Project Cost	N/A
Allocation thru FY 2010	N/A
ARRA Funding	\$5,940,000
Allocation for FY 2011	\$1,613,000
Allocation for FY 2012	\$1,765,000
President Budget FY 2013	\$2,578,000
Amount That Could Be Used for FY 2013	\$2,578,000
Balance to Complete	N/A

**SCHEDULE:**


**FY 2012 Scheduled Work:** The current FY 2012 budget is being used for routine operations and maintenance activities at this project. A portion of the FY 2012 budget will also be used to install a ground source heat pump system at the project office in order to decrease use of non-renewable energy sources at the project.

**FY 2013 Budget:** The FY 2013 President's budget will be used for routine operations and maintenance activities at the project.

**COMPLETION:** N/A. Operating project.

**For more information** regarding Marion Lake, contact Rick Sellers, Lake Manager, at (620) 767-5195 or [Ricky.L.Sellers@usace.army.mil](mailto:Ricky.L.Sellers@usace.army.mil).

# PROJECT MAP MARION LAKE, KANSAS

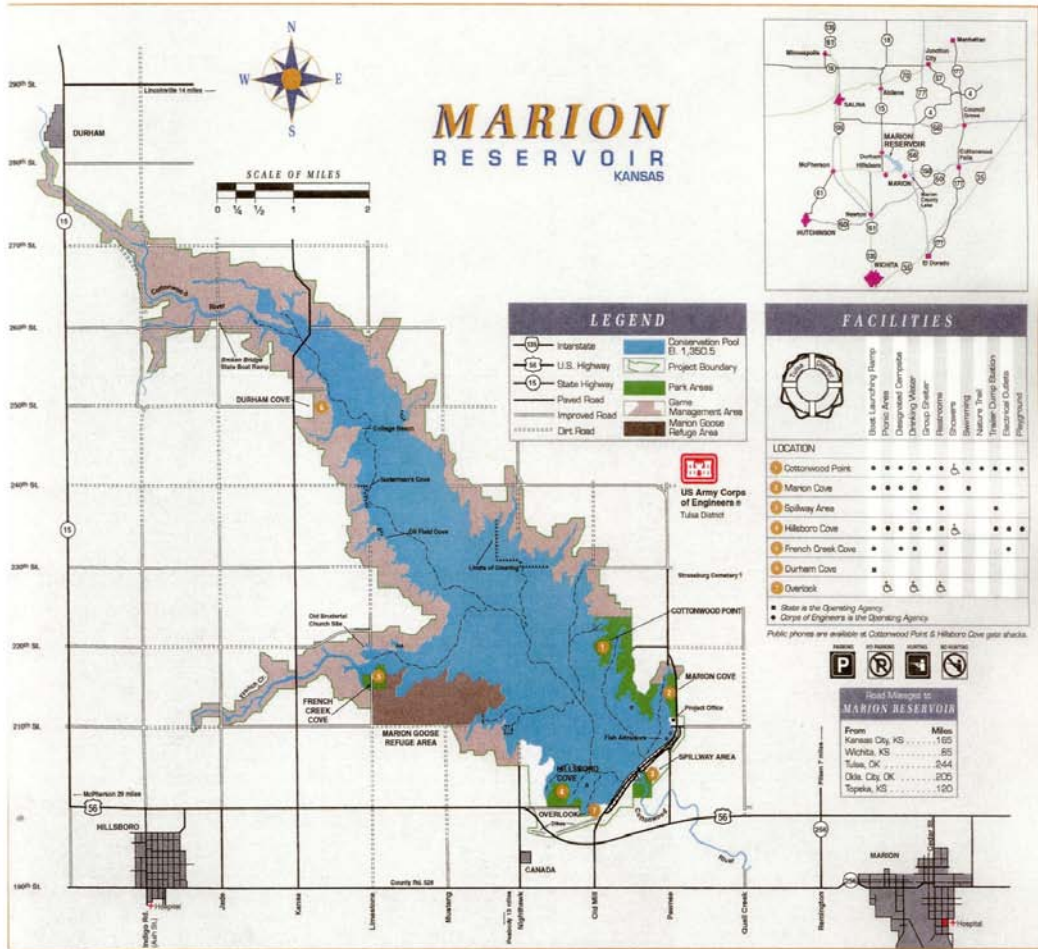

**U.S. ARMY CORPS OF ENGINEERS – TULSA DISTRICT**  
[www.swt.usace.army.mil](http://www.swt.usace.army.mil)